

# In-Adapter Ferrule Cleaner


## AFC-3000

### Features:

- ◆ Superior Cleaning
- ◆ Innovative Technology
- ◆ Battery-powered
- ◆ Portable
- ◆ Automated Operation
- ◆ Fast: ~ 3 sec / cleaning cycle
- ◆ Lightweight
- ◆ Rugged
- ◆ Dry Process
- ◆ Applications
  - Optical Components
  - Patch Panel
  - Test Instrument
  - Systems



Before

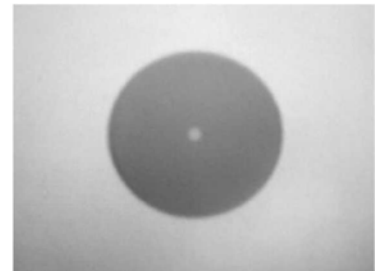

After

- In-Adapter fiber optic connector cleaning
- Disposable cartridge
- 600 cleanings per cartridge
- Removes grease, dust, and other organic & inorganic contaminants
- Consistent and effective cleaning
- Device can be suited to fit male/female types of connectors and adapters

## Ordering Options

AFC-3000	In-Adapter connector cleaner, including cartridge and one adapter tip of choice
EXT-4	4" extension for use with CFC-600-L (For 2.5mm ferrules only)
CFC-600-S	Short-tip replacement cartridge for 2.5mm ferrules
CFC-600-L	Long-tip replacement cartridge for 2.5mm ferrules (for use with EXT-4 4" extension)
CFC-600-LC	Replacement cartridge for LC and other 1.25mm ferrules; also for SMPTE 304M
TFC-100M/F	Adapter tip for FC PC/APC connectors (male or female)
TSC-100M/F	Adapter tip for SC PC/APC connectors (male or female)
TST-100M/F	Adapter tip for ST connectors (male or female)
TE2K-100M/F	Adapter tip for E-2000 PC/APC connectors (male or female)
TLC-100M/F	Adapter tip for LC PC/APC connectors (male or female)
TLM-100M	Adapter tip for SMPTE 304M (LEMO) connectors (male only)



## Specifications

Cartridge Size Options	2.5mm long, 2.5mm short, 1.25mm
Cleaning Cartridge Capacity	600 cleanings
Operating Noise	< 45 dBA
Operating Temperature	-10°C ~40°C
Storage Temperature	-30°C ~60°C
Power Supply (DC)	2 AA batteries (1.5 Vdc each)
Weight	14 oz.

Available from

**Optimark**  
**Fiber Optics**  
 14 Heath Wood Lane, Chestnut Hill MA 02467-2685 US  
 Tel: +1 617 232-6224 Fax: +1 617 731-2272  
 www.optimark-fiber.com sales@optimark-fiber.com